


# SOUNDER-BEACON UNITS

## CHIASO RAZOR



- | High sound output
- | Low current consumption
- | Exclusive Design
- | 39 tones user selectable
- | Automatic synchronisation
- | Second tone for two stage alarms
- | Volume control
- | Flexible capabilities
- | LED technology
- | VdS submitted

- Fire
- Security
- Industrial
- Railway
- Marine
- Optical
- Acoustic

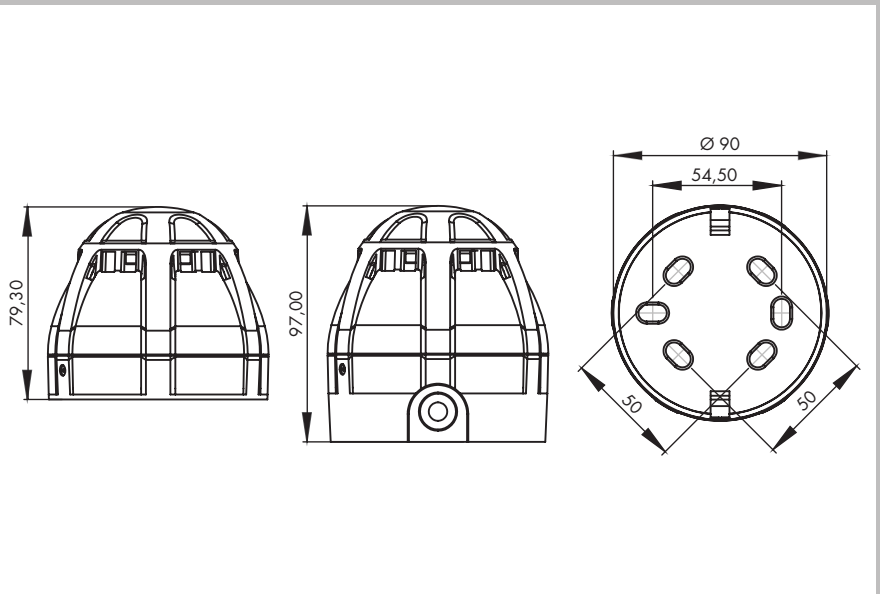

### SPECIFICATIONS

MODEL	Chiasso Razor
Operating voltage	9-28VDC
Current consumption	max. 40mA / 40mA @ DIN Tone
Sound output	67-100dB(A) / 97dB(A) @ DIN Tone
Alarm tones	39
IP rating	Shallow Base: IP54, Deep Base: IP65
Operating temperature	-25°C to +70°C
Body colour	red or white
Lens colours	red, amber, green, blue, clear
Construction	ABS FR
Construction lens	PC
Approvals	VdS (submitted)

Unless otherwise noted specifications at 24VDC. Tonetables on request or to download on [www.compro.de/tontabellen](http://www.compro.de/tontabellen)